



RCCN 日成 R 型裸端子 R Non-Insulated Ring Terminals

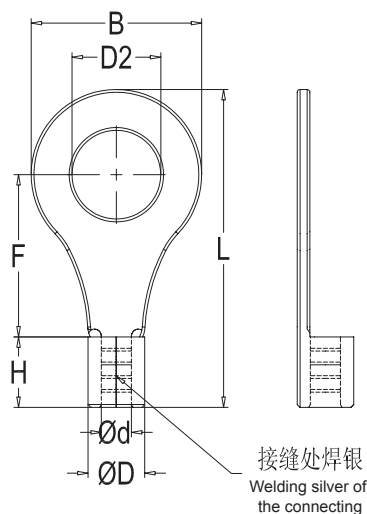

说明：本系列配套工具 YIT-8 YIT-70 240
Note: installed by crimp tool YIT-8


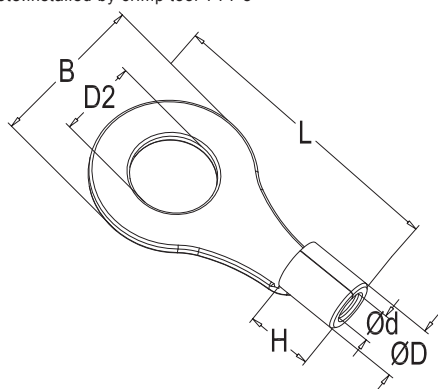


型号 Item No.	AWG mm ² 电流/包装	尺寸 DIMENSION						
		螺栓口直径 Dia. of bolt D2	B mm	L mm	F mm	H mm	D φ mm	d φ mm
R1.25-3	22-16 0.5-1.5 19A 1000PCS	3.2mm	5.5	12.5	5.0	4.8	3.4	1.7
RS1.25-3.5		3.7mm	5.5	12.5	5.0			
RM1.25-3.5		3.7mm	6.6	14.4	6.3			
RL1.25-3.5		3.7mm	8.0	15.8	7.0			
RS1.25-4		4.3mm	6.6	14.4	6.3			
RL1.25-4		4.3mm	8.0	15.8	7.0			
R1.25-5		5.3mm	8.0	15.8	7.0			
RL1.25-5		5.3mm	9.8	18.0	8.5			
RS1.25-6		6.4mm	9.8	18.0	8.5			
RL1.25-6		6.4mm	11.6	21.8	11.0			
RL1.25-8		8.4mm	11.6	21.8	11.0			
RL1.25-10		10.5mm	13.6	25.5	13.9			
RL1.25-12		13.0mm	19.2	30.4	16.0			
R2-3	16-14 1.5-2.5 27A 1000PCS	3.2mm	6.6	12.8	4.8	4.8	4.1	2.3
RS2-3.5		3.7mm	6.6	12.8	4.8			
RM2-3.5		3.7mm	6.6	14.4	6.3			
RL2-3.5		3.7mm	8.5	16.5	7.4			
RS2-4		4.3mm	6.6	14.4	6.3			
RL2-4		4.3mm	8.5	16.5	7.4			
RS2-5		5.3mm	8.5	16.5	7.4			
RL2-5		5.3mm	9.5	17.0	7.4			
R2-6		6.5mm	12.0	21.8	11.0			
R2-8		8.4mm	12.0	21.8	11.0			
R2-10		10.5mm	13.6	25.5	13.9			
R2-12		13.0mm	19.2	30.4	16.0			
R3.5-4	14-12 2.5-4 37A 500PCS	4.3mm	8.0	18.0	7.7	6.0	5.0	3.0
RS3.5-5		5.3mm	8.0	18.0	7.7			
RL3.5-5		5.3mm	12.0	21.4	7.7			
R3.5-6		6.4mm	12.0	21.4	7.7			
R3.5-8		8.4mm	15.0	27.0	13.5			
R3.5-10		10.5mm	15.0	27.0	13.5			
R5.5-3.5	12-10 4-6 48A 500PCS	3.7mm	7.2	15.7	6.1	6.8	5.6	3.4
RS5.5-4		4.3mm	7.2	15.7	6.1			
RL5.5-4		4.3mm	9.5	19.0	8.3			
R5.5-5		5.3mm	9.5	19.0	8.3			
R5.5-6		6.5mm	12.0	22.5	10.5			
R5.5-8		8.4mm	15.0	27.0	13.3			
R5.5-10		10.5mm	15.0	27.0	13.3			
R5.5-12		13.0mm	19.2	31.6	16.0			
R8-4	8 6-10 62A 500PCS	4.3mm	8.8	23.8	9.3	8.5	7.2	4.5
RS8-5		5.3mm	8.8	23.8	10.5			
RM8-5		5.3mm	12.0	23.8	9.3			
RL8-5		5.3mm	15.0	29.8	13.8			
RS8-6		6.5mm	12.0	23.8	9.3			
RL8-6		6.5mm	15.0	29.8	13.8			
R8-8		8.4mm	15.0	29.8	13.8			
R8-10		10.5mm	15.0	29.8	13.8			
R8-12		13.0mm	20.0	33.5	15.0			
R14-4	6 10-16 88A 500PCS	4.3mm	12.0	29.8	13.3	10.5	9.0	5.8
R14-5		5.3mm	12.0	29.8	13.3			
RS14-6		6.4mm	12.0	29.8	13.3			
RL14-6		6.4mm	16.0	32.5	14.2			
R14-8		8.4mm	16.0	32.5	14.2			
R14-10		10.5mm	16.0	32.5	14.2			
R14-12		13.0mm	22.0	41.0	19.8			

RCCN 日成R型裸端子 R Non-Insulated Ring Terminals



说明：本系列配套工具 YTT-8 YTT-70 240
Note: installed by crimp tool YTT-8

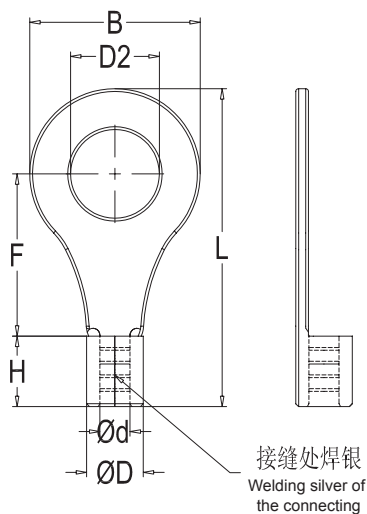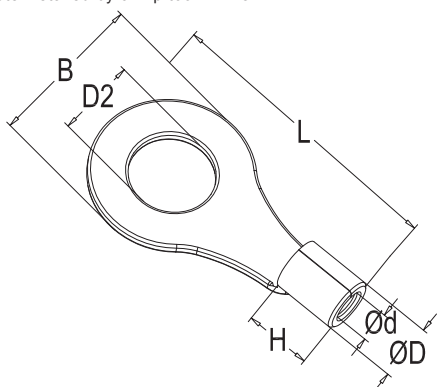

型号 Item No.		
180平方/440A	200-300平方/470A	300-400平方/650A
R180-8	R200-8	R325-8
R180-10	R200-10	R325-10
R180-12	R200-12	R325-12
R180-14	R200-14	R325-14
R180-16	R200-16	R325-16
R180-18	R200-18	R325-18
R180-20	R200-20	R325-20
R180-22	R200-22	R325-22
R180-24	R200-24	R325-24
R180-27	R200-27	R325-27

型号 Item No.	尺寸 DIMENSION							
	AWG mm ² 电流/包装	螺栓口直径 Dia. of bolt D2	B mm	L mm	F mm	H mm	Dφ mm	dφ mm
RS22-5	4 16~25 115A 100PCS	5.3mm	12.2	33.2	15.1	12.0	11.5	7.7
RL22-5		5.3mm	16.5	33.5	13.5			
RS22-6		6.5mm	12.2	33.0	15.1			
RL22-6		6.5mm	16.5	33.5	13.5			
R22-8		8.4mm	16.5	33.5	16.5			
R22-10		10.5mm	16.5	33.5	16.5			
R22-11		11.5mm	22.0	42.5	19.7			
R22-12		13.0mm	22.0	42.5	19.7			
R38-5	2 35~50 160A 100PCS	5.3mm	15.3	39.0	17.4	14.0	13.3	9.4
R38-6		6.4mm	15.3	39.0	17.4			
RS38-8		8.4mm	15.3	39.0	17.4			
RL38-8		8.4mm	22.0	42.7	17.7			
RS38-10		10.5mm	15.3	39.0	17.4			
RL38-10		10.5mm	22.0	42.7	17.7			
R38-11		11.5mm	22.0	42.7	17.7			
R38-12		13.0mm	22.0	42.7	17.7			
R60-6	1/0 50~70 215A 100PCS	6.5mm	22.0	49.7	20.7	18.0	15.4	11.7
R60-8		8.4mm	22.0	49.7	20.7			
R60-10		10.5mm	22.0	49.7	20.7			
R60-12		13.0mm	22.0	49.7	20.7			
R60-14		15.0mm	32.0	57.5	23.5			
R60-16		17.0mm	32.0	57.5	23.5			
R60-18		19.0mm	32.0	57.5	23.5			
R60-20		21.0mm	32.0	57.5	23.5			
R70-6	2/0 70 235A 100PCS	6.5mm	24.0	51.0	20.0	19.0	17.5	13.0
R70-8		8.4mm	24.0	51.0	20.0			
R70-10		10.5mm	24.0	51.0	20.0			
R70-12		13.0mm	24.0	51.0	20.0			
R70-14		15.0mm	32.0	61.0	26.0			
R70-16		17.0mm	32.0	61.0	26.0			
R70-18		19.0mm	32.0	61.0	26.0			
R70-20		21.0mm	32.0	61.0	26.0			
R80-6	3/0 80 255A 100PCS	6.5mm	27.0	53.5	20.7	20.0	19.5	14.5
R80-8		8.4mm	27.0	53.5	20.7			
R80-10		10.5mm	27.0	53.5	20.7			
R80-12		13.0mm	27.0	53.5	20.7			
R80-14		15.0mm	32.0	68.0	32.0			
R80-16		17.0mm	32.0	68.0	32.0			
R80-18		19.0mm	32.0	68.0	32.0			
R80-20		21.0mm	32.0	68.0	32.0			
R100-6	4/0 95~100 300A 100PCS	6.5mm	28.5	55.6	20.4	21.0	22.1	16.4
R100-8		8.4mm	28.5	55.6	20.4			
R100-10		10.5mm	28.5	55.6	20.4			
R100-12		13.0mm	28.5	55.6	20.4			
R100-14		15.0mm	32.0	69.0	32.0			
R100-16		17.0mm	32.0	69.0	32.0			
R100-18		19.0mm	32.0	69.0	32.0			
R100-20		21.0mm	32.0	69.0	32.0			
R150-8	250/300MCM 120~150 395A 100PCS	8.4mm	36.0	66.0	23.0	27.0	26.6	19.5
R150-10		10.5mm	36.0	66.0	23.0			
R150-12		13.0mm	36.0	66.0	23.0			
R150-14		15.0mm	36.0	66.0	23.0			
R150-16		17.0mm	36.0	66.0	23.0			
R150-18		19.0mm	36.0	81.0	36.0			
R150-20		21.0mm	36.0	81.0	36.0			
R150-22		23.0mm	36.0	81.0	36.0			
R150-24		25.0mm	36.0	81.0	36.0			