



PC male thread straight-through pipe joint

PC male thread straight-through pipe joint

Material: plastic socket: POM, imported sealing ring: stainless steel circlip, body: brass

Operating pressure range: 0-10kgf/cm²

Operating temperature range: -20~70°C

General hose: PU tube or nylon hose


Color: plastic socket: blue, body: brass (no plating)

- 1. Small appearance, saving installation space and high cost performance.
- 2. The threaded part is coated with sealant to ensure that there is no leakage in the threaded connection part.
- 3. The color of the plastic interface part is available in blue, white, and black to facilitate your overall piping needs.



PC male thread straight-through pipe joint

Specification




Item No.	0D	Connection thread/R	Package /PCS
PC4-M5	4	M5x0.8	100
PC4-01	4	PT1/8	100
PC4-02	4	PT1/4	100
PC4-03	4	PT3/8	100
PC4-04	4	PT1/2	100
PC6-M5	6	M5x0.8	100
PC6-01	6	PT1/8	100
PC6-02	6	PT1/4	100
PC6-03	6	PT3/8	100
PC6-04	6	PT1/2	100
PC8-01	8	PT1/8	100
PC8-02	8	PT1/4	100
PC8-03	8	PT3/8	100
PC8-04	8	PT1/2	100
PC10-01	10	PT1/8	100
PC10-02	10	PT1/4	100
PC10-03	10	PT3/8	100
PC10-04	10	PT1/2	100
PC12-01	12	PT1/8	100
PC12-02	12	PT1/4	100
PC12-03	12	PT3/8	100
PC12-04	12	PT1/2	100

Product Show

零部件拆解，全方位解析

PARTS DISMANTLING, COMPREHENSIVE ANALYSIS

追求每个零件的完美统一

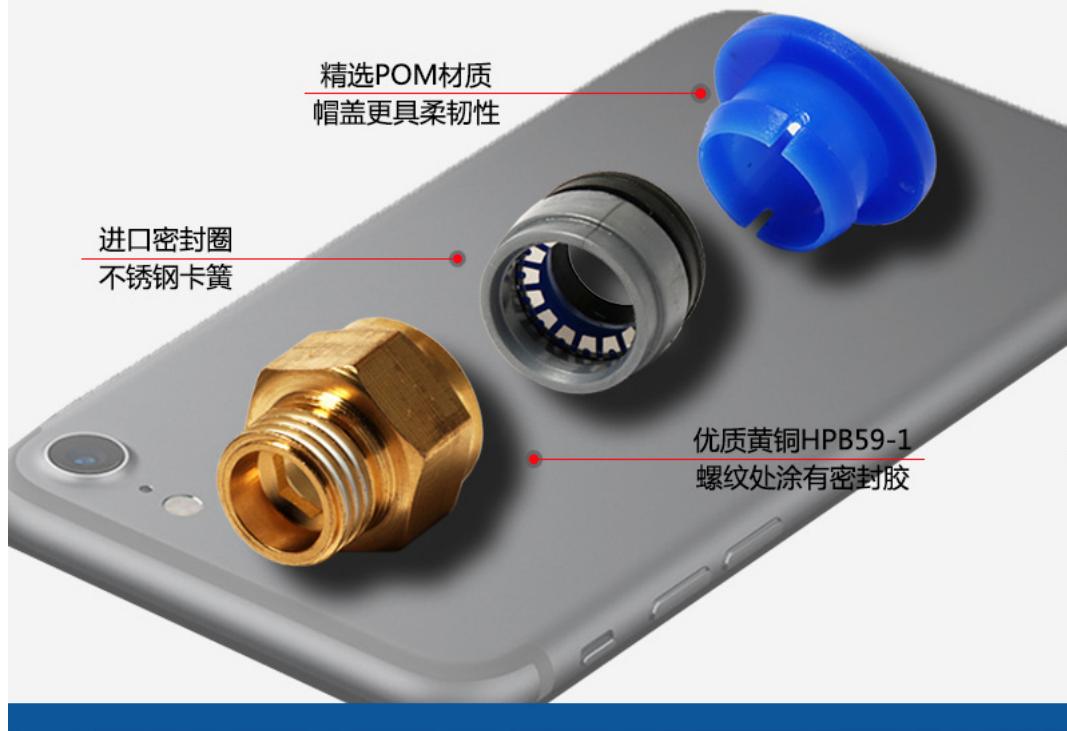

Push-in fittings

快插接头 PC外螺纹直通



