



PCF female thread straight-through pipe joint

PCF female thread straight-through pipe joint

Material: plastic socket: POM, imported sealing ring: stainless steel circlip, body: brass

Operating pressure range: 0-10kgf/cm²

Operating temperature range: -20~70°C


General hose: PU tube or nylon hose

Color: plastic socket: blue, body: brass (no plating)

1. Compact appearance, saving installation space and high cost performance.
2. The threaded part is coated with sealant to ensure that there is no leakage in the threaded connection part.
3. The color of the plastic interface part is available in blue, white, and black to facilitate your overall piping needs.



Specification



Item No.	OD	Connection thread/R	Package /PCS
PCF4-M5	4	M5x0.8	100
PCF4-01	4	PT1/8	100
PCF4-02	4	PT1/4	100
PCF4-04	4	PT1/2	100
PCF6-M5	6	M5x0.8	100
PCF6-01	6	PT1/8	100
PCF6-02	6	PT1/4	100
PCF6-03	6	PT3/8	100
PCF6-04	6	PT1/2	100
PCF8-01	8	PT1/8	100
PCF8-02	8	PT1/4	100
PCF8-03	8	PT3/8	100
PCF8-04	8	PT1/2	100
PCF10-01	10	PT1/8	100
PCF10-02	10	PT1/4	100
PCF10-03	10	PT3/8	100
PCF10-04	10	PT1/2	50
PCF12-01	12	PT1/8	100
PCF12-02	12	PT1/4	100
PCF12-03	12	PT3/8	100
PCF12-04	12	PT1/2	50

Product Show



耐高压 & 不脱扣


能够承受更大更强而不脱扣，安装方便，使用寿命长

精工压铸

坚固耐用

杜绝漏气



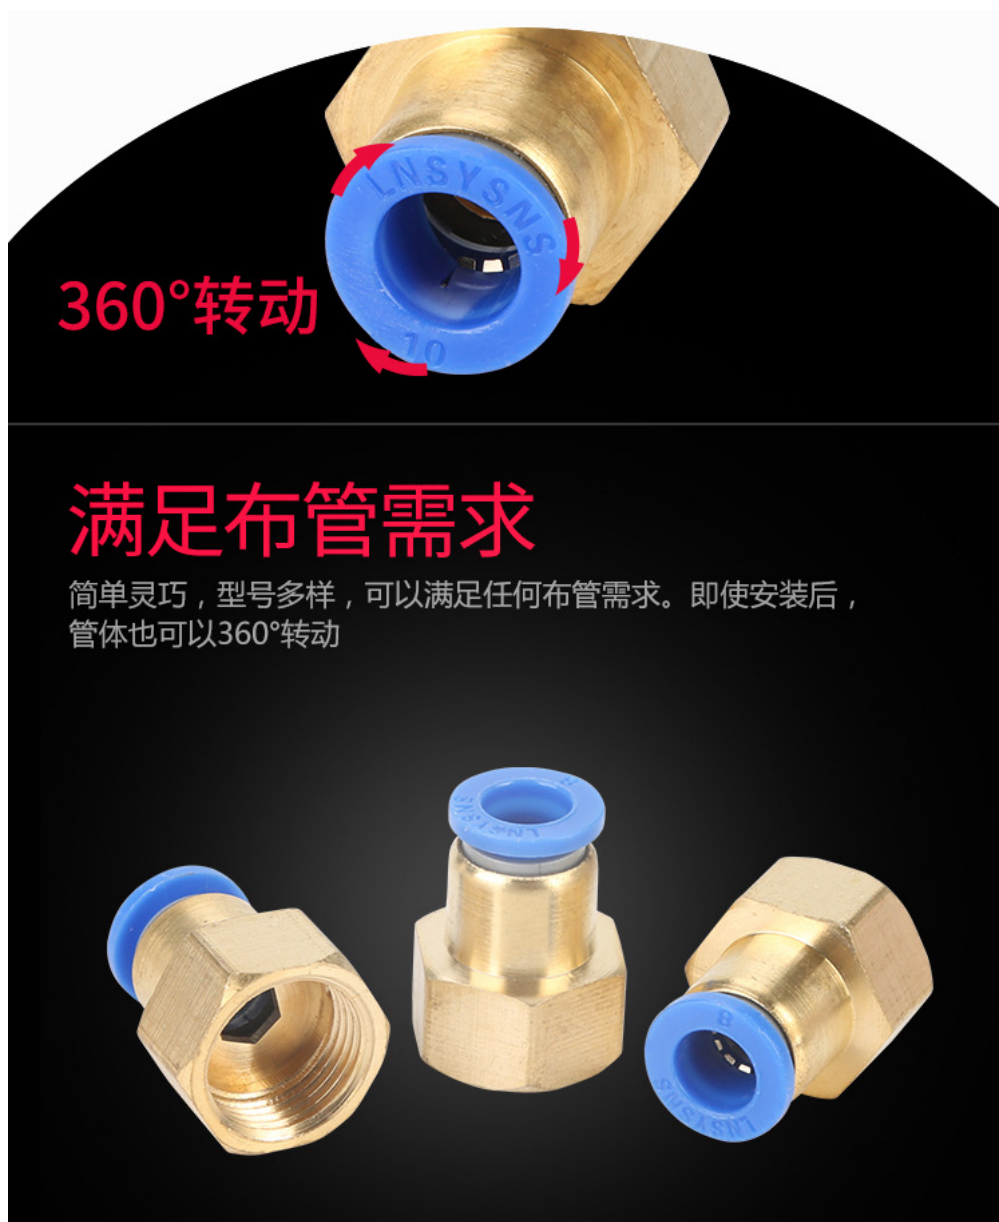



密封性能佳

螺纹采用预涂四氟乙烯胶，密封性能好

多种规格可选

适用于多种场合 应用范围广



EXQUISITE QUALITY

严格工艺精湛品质

更精密的工艺更高品质的产品

5 BIG COMMITMENT TO LET YOU IN SUHENG FURNITURE STRICT WORKMANSHIP

EXQUISITE QUALITY SHOPPING WORRY FREE



抗腐蚀强



经久耐用



抗温性强



品质保障



不生锈



