



Metal waterproof connector

LED lighting dedicated

Material: A, C, F parts are made of brass nickel, B, E made of anti-aging silicone rubber.

Product Certification: European RoHS certification.

Protection class: IP68.

Operating temperature: static -40 °C to 150 °C.

Features: special conical compression with the structure, with the tight head assembly time and convenience, to tighten the cable range, waterproof, dust, salt, acid, alcohol and other general solvents.

Uses: lighting equipment, refrigeration and air conditioning, communications equipment and outdoor wire and cable engineering and other harsh environment.








LED waterproof connector

LED lamps for waterproof connector

LED silicone waterproof connector

Specification



对边W1/对角W2


螺母
Lock Nut

A



O型圈
O-Ping


B

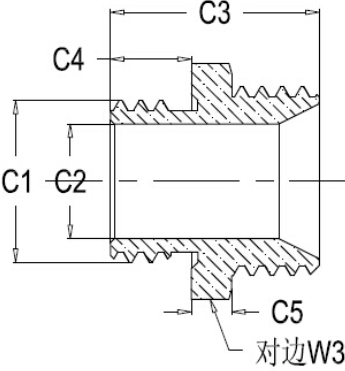

对边W3/对角W4


本体
Body

C



夹紧圈
Seal

E

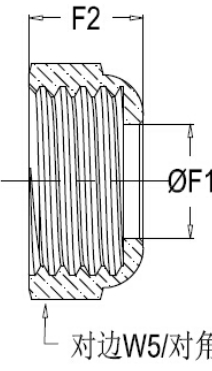

对边W5/对角W6

迫紧头
SealingNut

F

Item No	Thread	Cable Range Φ	Thread O.D. D1	Panel Mounting Hole	Size										Spanner Size			Std.Pck Pcs
					A1	C1	C2	C3	C4	C5	E1	E2	F1	F2	W1/W2	W3/W4	W5/W6	
A-LED-M12X1.5 (3-6)	M12X1.5	3-6	12	12-12.3	2.5	12	8.5	15.5	6	3	6	9	8.5	8.5	14/15.5	16/17.5	16/17.5	100PCS
A-LED-M12X1.5 (4-8)	M12X1.5	4-8	12	12-12.3	2.5	12	8.5	16.5	7	3	8	9.5	10.3	8.5	14/15.5	16/17.5	16/17.5	
A-LED-M16X1.5 (4-8)	M16X1.5	4-8	16	16-16.3	2.8	16	10	18.5	6.5	4	8	9.5	9.5	9.7	18/20	18/19.8	18/19.8	

http://en.rccn.com.cn/content_products_882.html

1/3

A-LED-M16X1.5 (6-10)	M16X1.5	6-10	16	16-16.3	2.8	16	10	19.5	8	4	10	11	11.5	10	18/20	20/22.5	20/22.5
A-LED-M20X1.5 (8-12)	M20X1.5	8-12	20	20-20.3	3.2	2016	12.4	20.5	8.5	3.6	12	12	12.5	10	22/24.5	22/24.5	22/24.5
A-LED-PG7(3-6)	PG7	3-6	12.5	12.5-12.8	2.5	12.5	8.5	15.5	6	3	6	9	8.5	8.5	14/15.5	16/17.5	16/17.5

Product Show



